

Project: _____

Tag: _____

Engineer: _____

Contractor: _____


Date: _____

ELECTRIC BYPASS QUADRANGLE (RECTANGLE) DAMPER

MODEL: EBQD

Electronic Bypass Rectangular Damper

3-Wire, Floating Point, Motorized Rectangular
 Electric Bypass Damper

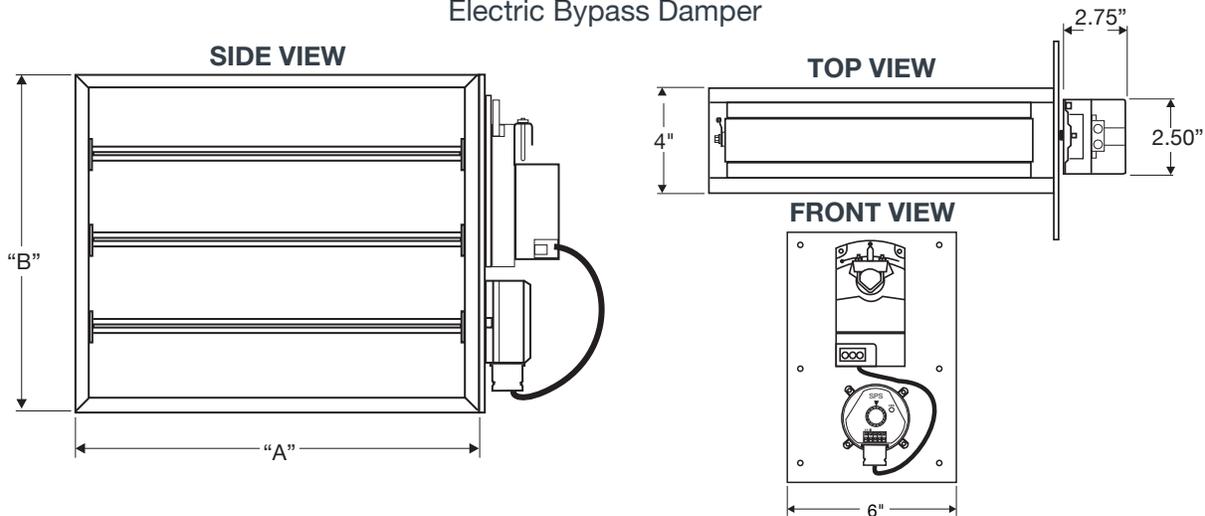

Dimensions and Applications:

- Models are available in Standard Sizes from 8" x 8" up to 36" x 24" in 2" increments
- EBQD Models are sized width (A) by height (B) with actuator on the (B) dimension
- Compatible with residential or light commercial HVAC applications that require maintaining a static pressure of 0.08" to 1.2" WC
- Actual (A) and (B) dimension are undercut 1/4"
- When ordering bottom mount models, the actuator will be placed on the (A) dimension

Standard Construction:

- 1/16" Extruded Aluminum frame, parallel blades and mounting flange
- Brass bushings for quiet operation
- Minimum position adjustment

Electrical and Power:

- Powered by a Power Close/Power Open Actuator
- 24 Volt, 2 VA, 90 Second Timing
- 3-Wire, Floating Point, 44 lb.-inch

Static Pressure Sensor:

- Factory Mounted
- 1/4" I.D. Flex hose connection
- Solid state control design
- Built-in LED for damper direction